

LPG VAPORIZER

Electric Heated and water bath type

Features

- * Electric - water bath type(Heat mass : water & Heating source : Electric heaters)
- * Design pressure : 1.76MPa(17.6bar)
- * Explosion proof : Class I, Division 1, Group D & Ex d IIB T4
- * Electric power : 220V 1P 50/60Hz, 220V 3P 50/60Hz, 380V 3P 50/60Hz, Etc
- * Removable high quality heating elements
- * Safety devices
 - Liquid LPG overflow cut-off device by float & Float reset
 - LPG Pressure safety valve : 1.76MPa(17.6bar)
 - High water temperature by using water temperature switch
 - Low water level by using water level switch
- * Explosion proof type electric power lamp for the power on-off condition
- * Electric power connections both the left side and right



Options

- * Solenoid valve on Liquid LPG Inlet for additional Liquid LPG overflow cut-off device
- * Control panel in the office.
- * Explosion proof type lamp of solenoid valve open-close
- * Explosion proof type lamp of electric heater on-off



LPG VAPORIZER

Electric Heated and water bath type

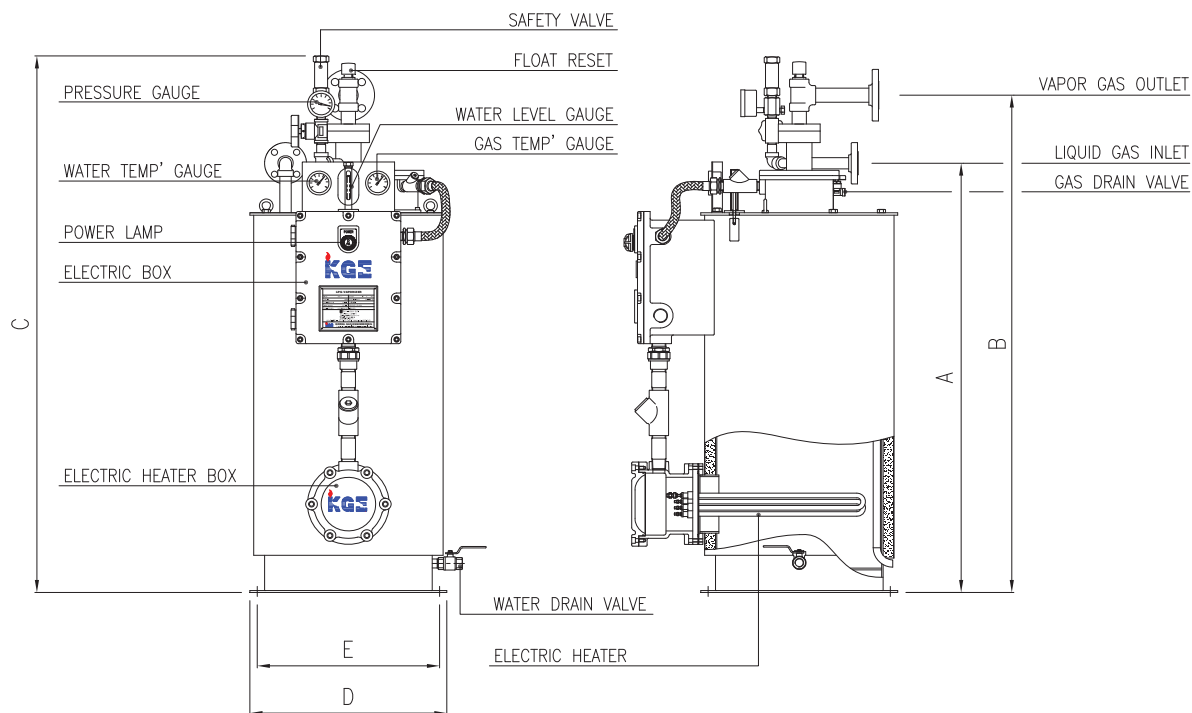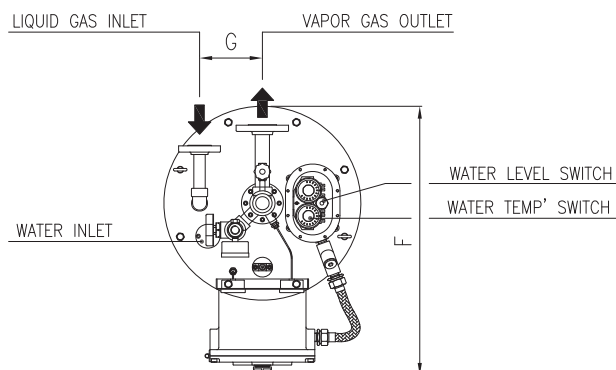

SPECIFICATIONS

MODEL	CAPACITY (kg/hr)	HEATER (kW)	DIMENSION (mm)							INLET	OUTLET
			A	B	C	D	E	F	G		
KEV-050	50	7.5	890	1055	1170	470	435	650	150	20A	25A
KEV-100	100	15	1040	1205	1300	470	435	650	150	20A	25A
KEV-150	150	22.5	1090	1255	1350	530	495	710	180	20A	25A
KEV-200	200	30	1030	1210	1310	610	575	790	180	20A	25A
KEV-300	300	45	1180	1360	1460	610	575	790	180	20A	25A
KEV-400	400	60	1080	1300	1400	820	785	1050	240	25A	50A
KEV-500	500	75	1180	1400	1500	820	785	1050	240	25A	50A